


BISTAR

TP6H72M
TP6H72M(H)

390 - 410W
half-cut mono perc

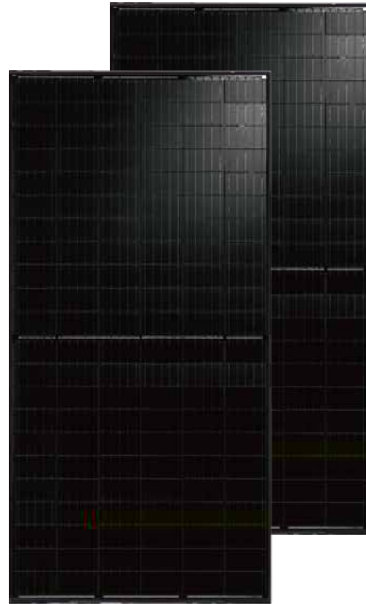

New circuit design, lower internal current, lower Rs loss



Special circuit design with much lower hot spot temperature



2% more power generation, lower LCOE



2 times of industry standard Anti-PID test by TUV SUD



High waterproof level

- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems



Linear Performance Warranty

Standard Performance Warranty

