

FEATHER

TP7F54M
TP7F54M(H) **108-cell**

395 - 415W


10BB PERC



- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



12 25 ■

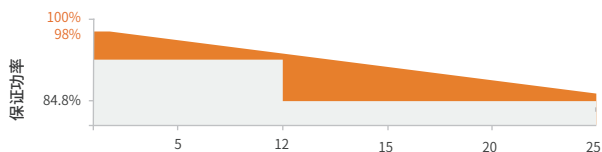

10BB

2%

0.55%



PID

PID
85 /85% RH 192



IP68

| | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT |
|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 395 | 294 | 400 | 298 | 405 | 302 | 410 | 306 | 415 | 310 |
| | 30.85 | 28.8 | 31.05 | 29.0 | 31.24 | 29.2 | 31.43 | 29.3 | 31.64 | 29.6 |
| | 12.81 | 10.23 | 12.89 | 10.30 | 12.97 | 10.36 | 13.05 | 10.42 | 13.13 | 10.48 |
| | 36.75 | 34.6 | 37.00 | 34.8 | 37.25 | 35.1 | 37.50 | 35.3 | 37.75 | 35.5 |
| | 13.69 | 11.04 | 13.78 | 11.11 | 13.86 | 11.17 | 13.94 | 11.24 | 14.02 | 11.30 |
| | 20.20 | | 20.50 | | 20.70 | | 21.00 | | 21.30 | |

| | |
|--|---|
| | 10BB |
| | 108 (6*18) |
| | 1722*1134*30mm (67.80*44.65*1.18) |
| | 16.2kg (35.72lbs.) |
| | 2.0mm |
| | |
| | IP68, 3 Bypass Diodes |
| | 4mm ² (IEC), 12AWG (UL) 300mm |
| | T01/LJQ-3-CSY/MC4/MC4-EVO2 |
| | |
| | 1000V/1500V/DC |
| | -40°C~+85°C |
| | 25A |
| | Class |
| | |
| | |

